


746 E R

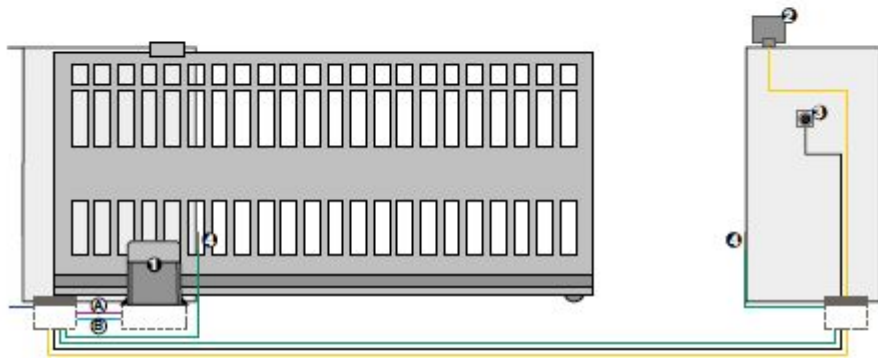

A Low voltage cabling
 ■ 3x0.50 cable
 ■ 2x0.50 cable

B Power cabling (230V)
 ■ 2x1.5+T cable
 ■ 2x1.5 cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	746 E R Z16 Gearmotor with incorporated electronic control unit and encoder
1	1	Foundation plate with lateral and height adjustments (6 pc. pack)
1	1	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
1	1	Plug in receiver 1 channel RP 433 SLH
2	1	FAACLIGHT 230V flashing light
3	1	Key operated button T10 E
4	1	Pair of photocells XP 20D
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.