


390 230V

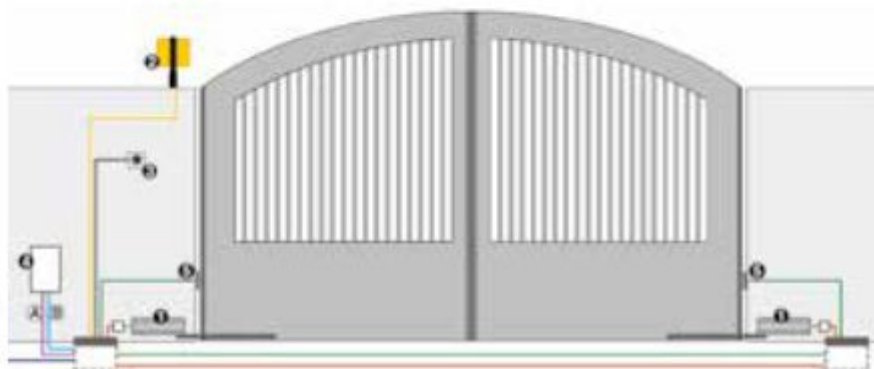

(A) Low voltage cabling
 ■ 3x0,50 mm² cable
 ■ 2x0,50 mm² cable

(B) Power cabling (230V)
 ■ 3x1,50 mm² +T cable
 ■ 2x1,5 mm² +T cable
 ■ 2x1,5 mm² cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	2	390 - 230V Operators
1	2	Jointed arm
2	1	FAACLIGHT 230V flashing light
3	1	Key operated button T10 E
4	1	E045 electronic control unit
4	1	Enclosure mod. E for electronic control units
4	1	XF 433 MHz receiver
5	1	Pair of photocells XP 20 BD
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.