


391

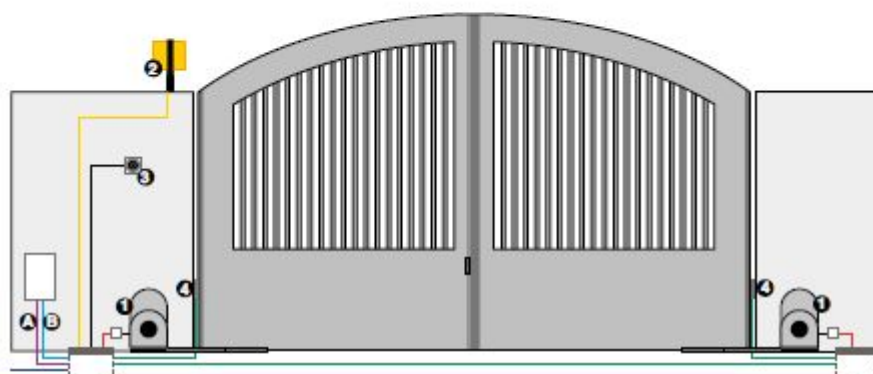

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	391 E Operator with electronic control unit and articulated arm
1	1	391 Operator with articulated arm
1	1	XF 433 MHz receiver
2	1	FAACLED 24V flashing lamp
3	1	Key operated button T10 E
4	1	Pair of photocells XP 20 BD
1	1	XT2 433 SLH LR 2-channel transmitter

A Low voltage cabling

- 3x0,50 mm² cable
- 2x0,50 mm² cable
- 2x2,50 mm² cable
- 2x1,50 mm² cable

B Power cabling (230V)

- 2x1,5 mm² +T cable

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.