


844 R Reversible

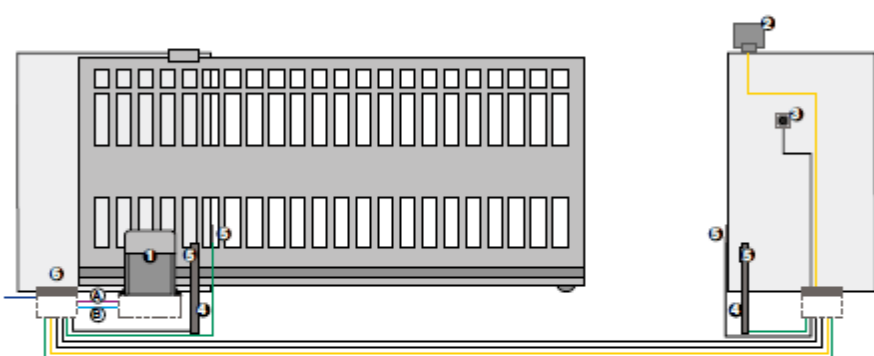

A Low voltage cabling
 ■ 3x0,50 mm² cable
 ■ 2x0,50 mm² cable

B Power cabling (230V)
 ■ 2x1,5 mm² +T cable
 ■ 2x1,5 mm² cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	844 R Z12 Reversible Gearmotor
1	1	Foundation plate with lateral and height adjustments (6 pc. pack)
1	1	Galvanised rack 30x12 mod. 4 with attachments to weld included (4m pack, 1 m each)
2	1	FAACLIGHT 230V flashing light
3	1	Key operated button T10
4	2	Pair of photocells XP30
5	2	Adapter for column
4	2	Low column in aluminium (2 pcs. pack)
5	2	Foundation plate for aluminium column (T10 - T11 - T10 E - T11 E) (10 pc. pack)
6	1	578 D electronic control unit (remote installation)
6	1	Enclosure mod. L for electronic control units
6	1	Plug in receiver 1 channel RP 433 SLH
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.