


541 3PH

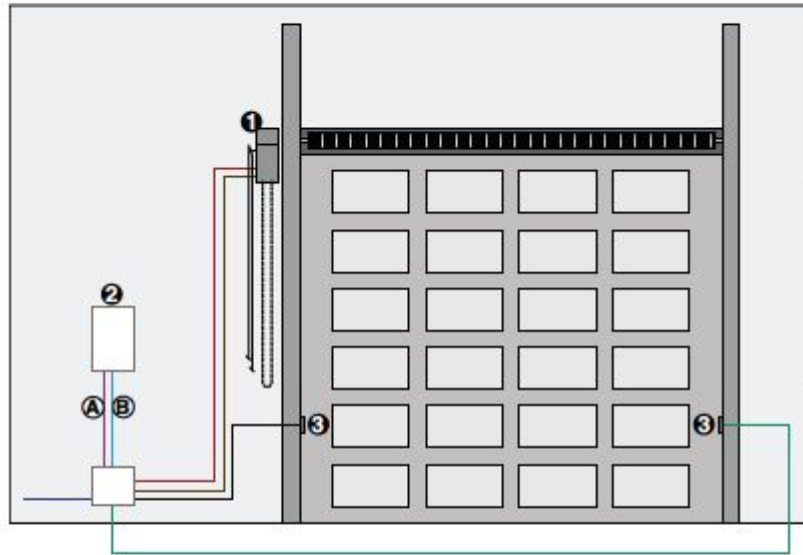

- **(A) Low voltage cabling**
■ 3x0.50 cable
■ 2x0.50 cable
■ 2x0.50 cable
■ 4x0.50 cable
- **(B) Power cabling (400V)**
■ 4x1,5 mm² +T cable
■ 3x1,5 mm² cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	541 V 3PH Geramotor with integrated encoder
2	1	Electronic unit EB 540BPR 3PH includes 540BPR control board, container, isolator switch, contactors, control keypad and activation key)
2	1	Plug in receiver 1 channel RP 433 SLH
3	1	Pair of photocells XP 30
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.