


580

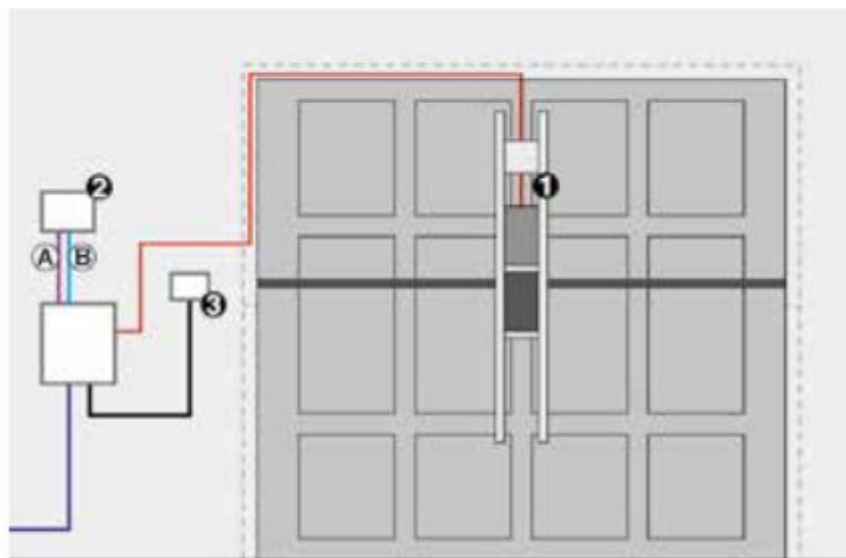

(A) Low voltage cabling
3x0,50 mm² cable

(B) Power cabling (230V)
■ 3x1,5 mm² +T cable
■ 2x1,5 mm² +T cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	580 CBAC operator
1	1	Securing longitudinal support length 1.5 m
2	1	615BPR electronic control unit
2	1	Plug in receiver 1 channel RP 433 SLH
2	1	Enclosure mod. E for electronic control units
3	1	Key operated button T10-E
1	1	Packs for 1 operator with telescopic arms, struts and pipes
1	1	External release with key (for doors with max thickness 15 mm from no.1 to no.36)
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.