


540

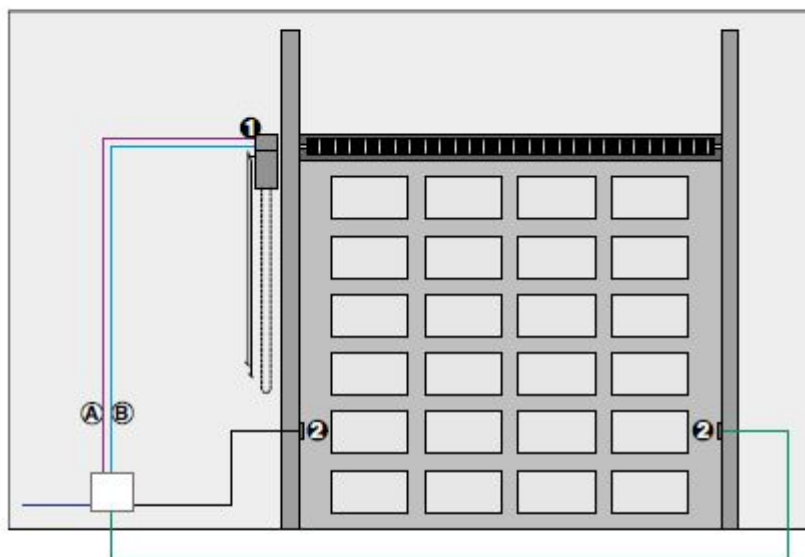

(A) Low voltage cabling
 ■ 3x0,50 mm² cable
 ■ 2x0,50 mm² cable

(B) Power cabling (230V)
 ■ 2x1,5 mm² +T cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	540 V BPR
1	1	Plug in receiver 1 channel RP 433 SLH
2	1	Pair of photocells XP 20D
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.