


550

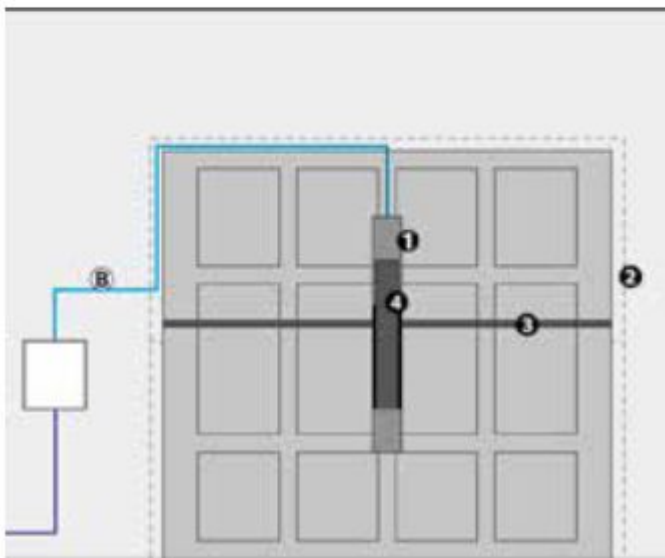

- (B) Power cabling (230V)
- 2x1,5 mm²+T cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	550 ITT Electromechanical operator with incorporated electronic control unit and encoder
1	1	Securing longitudinal support length 1.5 m
2	1	Packs with two curved telescopic arms
3	1	2 transmission pipes (length 1.5 m), with lateral supports, for installation with a central operator
4	1	External release with customised keys from no.1 to no. 50
4	1	Plug in receiver 1 channel RP 433 SLH
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.