


617

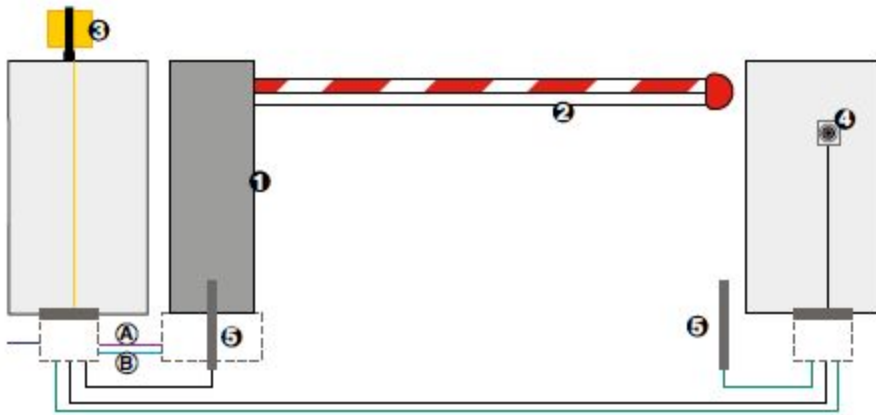

A Low voltage cabling
 ■ 3x0,50 mm² cable
 ■ 2x0,50 mm² cable

B Power cabling (230V)
 ■ 2x1,5 mm² +T cable
 ■ 2x1,5 mm² cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	617/4
1	1	Foundation plate
1	1	Balancing springs for round beams
1	1	Plug in receiver 1 channel RP 433 SLH
2	1	Beam bracket for round beams
2	1	Standard round beam - Length 5.000 mm
3	1	FAACLIGHT 230V flashing light
4	1	Key operated button T10
4	1	Plastic enclosure to be walled in
5	1	Pair of photocells XP30
5	2	Adapter for column
5	2	Low column in aluminium
5	2	Foundation plate for column
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.