


# 640

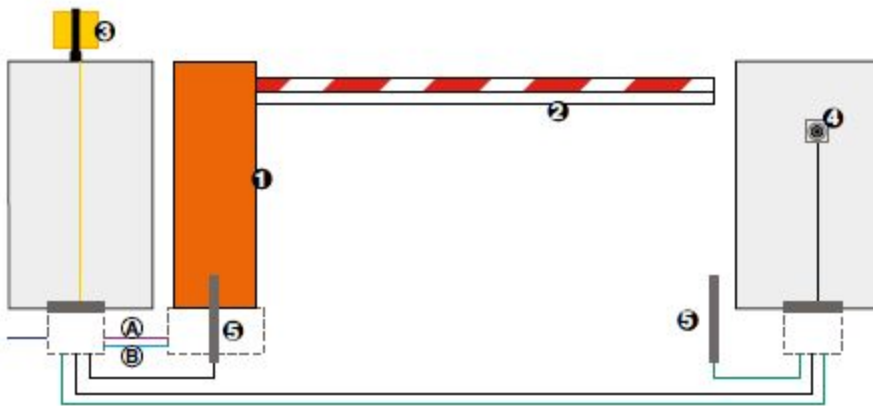

**A** Low voltage cabling  
 ■ 3x0,50 mm<sup>2</sup> cable  
 ■ 2x0,50 mm<sup>2</sup> cable

**B** Power cabling (230V)  
 ■ 2x1,5 mm<sup>2</sup> +T cable  
 ■ 2x1,5 mm<sup>2</sup> cable

## EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	640 Barrier
1	1	Foundation plate
1	1	Plug in receiver 1 channel RP 433 SLH
2	1	Beam bracket for rectangular beam
2	1	Fork support for beams
2	1	Rectangular standard beam - Length 7,000 mm
2	1	Support plate for fork
3	1	FAACLIGHT 230V flashing light
4	1	Key operated button T10-E
5	2	Column adapter
5	1	Pair of photocells XP 30
5	2	Low column in aluminium
5	2	Foundation plate for aluminium column
1	1	XT2 433 SLH LR 2-channel transmitter

*ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.*