


D600

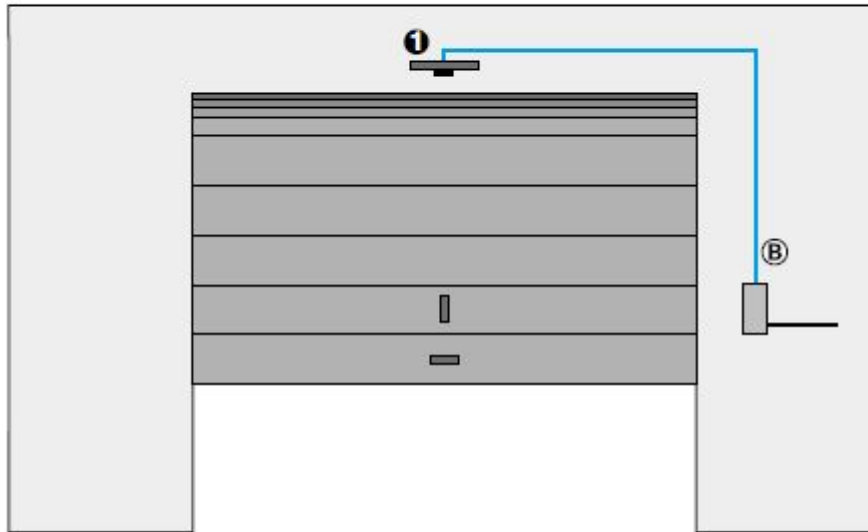

- (B) Power cabling (230V)
- 2x1,5 mm² +T cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	D600 DOLPHIN kit K868
1	1	Single piece rail with chain travel 2,000 mm
1	1	Receiver XF 868 MHz
1	1	Cable and sheath for external release (for application to the existing handle)
1	1	Two-channel transmitter XT2 868 SLH LR

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.