


D700 HS

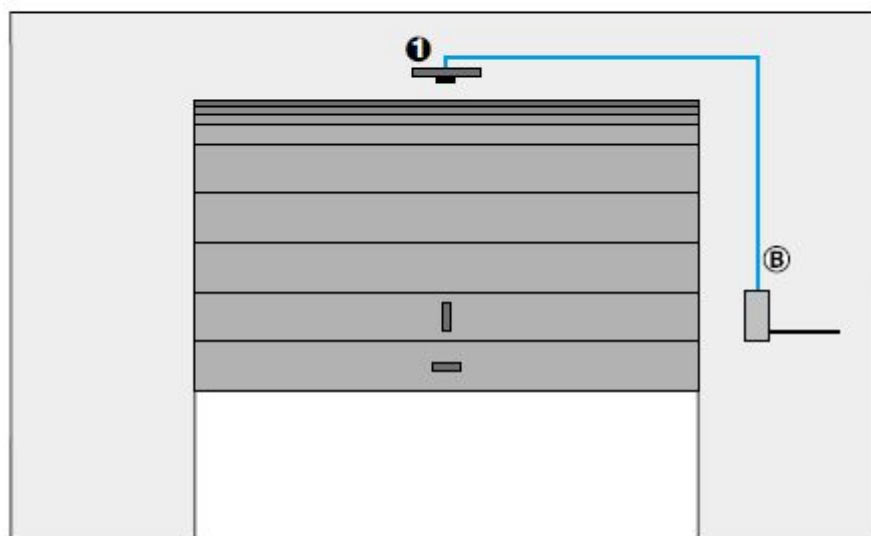

- (B) Power cabling (230V)
- 2x1,5 mm² +T cable

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description
1	1	D700 HS operator
1	1	Single track chain travel 2000
1	1	XF 433 MHz receiver
1	1	Cable and sheath for external release (application to existing handle)
1	1	XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.