


S800 ENC

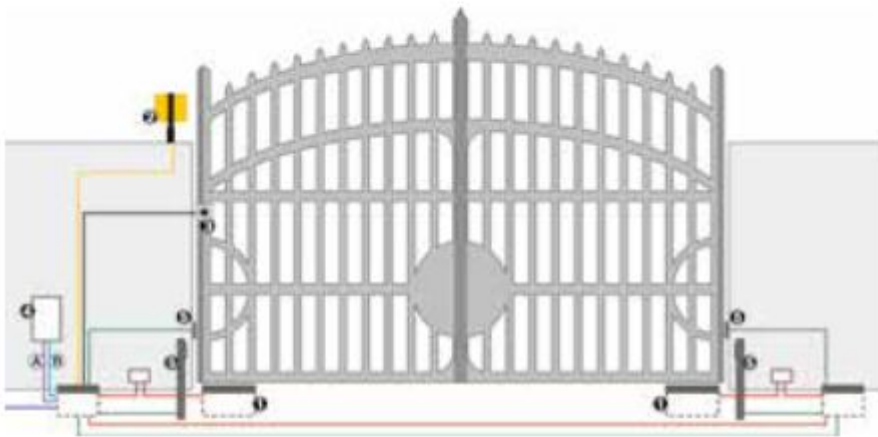

- A Low voltage cabling**
- 3x0,50 mm² cable
 - 2x0,50 mm² cable
 - 2x1,50 mm² cable
 - 2x2,50 mm² cable

- B Power cabling (230V)**
- 2x1,5 mm² +T cable

TYPICAL INSTALLATION DIAGRAM

Ref	Q.ty	Description
1	2	S800 ENC CBAC 100° 230V
1	2	Foundation box
1	2	Hydraulic release device (to be used with the code 390972) for operators CBAC or SBW
1	2	Splined joint group kit for CBAC or SBW operators (to be combined with code 390035)
2	1	FAACLIGHT 230V flashing light
3	1	Key operated button T10-E
4	1	E045 Electronic control unit
4	1	Enclosure mod. E for electronic control units
4	1	XF 433 MHz receiver
5	2	Pair of photocells XP 20 BD
5	2	Column (Max H 628 mm)
5	2	Foundation plate for column
1		XT2 433 SLH LR 2-channel transmitter

ATTENTION: The configuration does not include safety devices (e.g.: active or passive safety ribs) which are determined according to the specific "risk assessment" of each installation (Ref.: UNI-EN European Standards 12445 and 12453). The indicated price does not include the installation costs and the expenses for masonry, electrical and metalwork preparations.